FIRE, FORGE, DRILLAND EXLPOSIVE RESISTING





USA: UL TL-30 (EU: ABIS GRADE 2











🗐 USA: UL TL-30 🏻 🔘 EU: ABIS GRADE 2

ALL CMI SAFES COME WITH A FIVE YEAR WARRANTY, EXCLUDING FREIGHT AND TRAVELLING, WITH A 24 MONTH WARRANTY ON LOCKS.



FEATURES

- DOOR Total thickness 85mm. The "Security" door provides a 10mm steel front section supported by drill-resisting hardened plate over all vital lock areas with glass operated relocking devices.
- **BOLTWORK** Heavy 32mm diameter bolts of high grade steel provide three-way locking behind the specially strengthened lock bar chamber sections at front and rear top edges of the door.
- **LOCKING** Available in
- - Digital (Standard)
 - Dial combination
 - Key locking
 - Dual locking

- FRAME Heavy steel 6mm x 120mm wide frame with threshold plate at bottom.
- HINGES Adjustable heavy duty with hardened pins on ball bearing axis (pre-lubricated).
- FIRE RESISTING Fire pan fitted to rear of door with approved high fire resisting compound.
- Internal release mechanism standard.
- Door may be ordered with either left or right hand hinging.
- · Door is manufactured to standard below size. Custom size available upon request.
- Digital combination, duress and time delay locks may be fitted as an optional extra.

RESISTING TO Fire • Force • Drills • Explosives













COMMERCIAL GRADE STRONGROOM DOOR AND FRAME DESIGNED TO BE



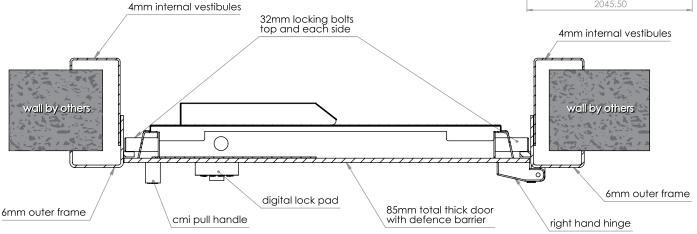

MODEL	PRICE INCL. GST	CLEAR DOOR OPENING AT 180°		CLEAR MASONRY OPENING REQUIRED		WEIGHT	DELIVERY & INSTALLATION LEVEL ACCESS
		HEIGHT	WIDTH	HEIGHT	WIDTH		INCL. GST
CD4 \$	\$	1980 mm	860 mm	2060 mm	1020 mm	410kg	\$

WHEN ORDERING PLEASE STATE IF LEFT OR RIGHT HAND HINGING REQUIRED AND EXISTING WALL THICKNESS.

CMI SAFE CO. ABN 20 118 637 245

Head Office: 244 West Street, Carlton NSW 2218 Phone: (02) 9547 1488 Fax: (02) 9547 2104

Website: www.cmisafe.com.au Email: sales@cmisafe.com.au

AVAILABLE FROM

CD RB 18/7/2019