BASIC GRADE STRONGROOM DOOR & FRAME







FOR THE SECURITY CONSCIOUS



[AS/NZS 3809:1998]





BASIC GRADE STRONGROOM DOOR & FRAME (AS/NZS 3809:1998)

ALL CMI SAFES COME WITH A FIVE YEAR WARRANTY, EXCLUDING FREIGHT AND TRAVELLING, WITH A 24 MONTH WARRANTY ON LOCKS.




- DOOR Total thickness 80mm. The "Basic" door provides a 6mm steel front section supported by a single mechanical relocking device.
- BOLTWORK Heavy 32mm diameter bolts of high grade steel provide two-way locking into the specially strengthened lock chamber sections at front and rear edges of the door.
- **LOCKING** ROSS 700 9 lever pick resistant key lock.
- FRAME Heavy steel 4mm frame with 125 x 12mm threshold plate at bottom.

- HINGES Adjustable heavy duty with hardened pins on ball bearing axis (pre-lubricated).
- Basic strongroom doors come in etch primer only.
- No internal release mechanism provided with Basic Strongroom.
- Door may be ordered with either left or right hand hinging.
- · Digital combination, duress and time delay locks may be fitted as an optional extra.





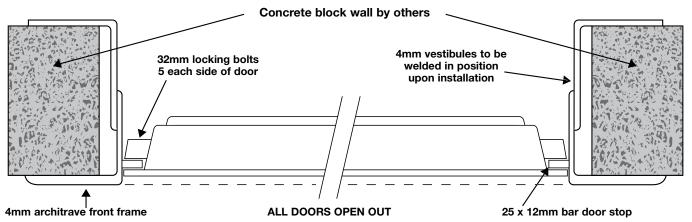

MODEL	PRICE INCL. GST	CLEAR DOOR OPENING		CLEAR MASONRY OPENING REQUIRED		WEIGHT	DELIVERY & INSTALLATION LEVEL
		HEIGHT	WIDTH	HEIGHT	WIDTH		ACCESS INCL. GST
BASICSRD4	\$	1980 mm	880 mm	2060 mm	1010 mm	310kg	\$
WHEN OF	RDERING PLEASE STATE IF I	LEFT OR RIG	HT HAND H	INGING REC	QUIRED AND	EXISTING V	VALL THICKNESS.

CMI SAFE CO. ABN 20 118 637 245

Head Office: 244 West Street, Carlton NSW 2218 Phone: (02) 9547 1488 Fax: (02) 9547 2104

Website: www.cmisafe.com.au Email: sales@cmisafe.com.au

					_
AVA	ILA	BLE	: FK	O	И