

COMMANDER STRONGROOM DOOR AND FRAME

TORCH AND DRILL RESISTING

 USA: UL TRTL-30 x 60  EU: ABIS GRADE 5



FOR THE
**SECURITY
CONSCIOUS**



 MODEL
CRD4



MADE IN AUSTRALIA



COMMANDER STRONGROOM DOOR AND FRAME

TORCH AND DRILL RESISTING



USA: UL TRTL-30 x 60



EU: ABIS GRADE 5

ALL CMI SAFES COME WITH A FIVE YEAR WARRANTY, EXCLUDING FREIGHT AND TRAVELLING, WITH A 24 MONTH WARRANTY ON LOCKS.

FEATURES

- Glass activated relocking devices are provided within the door as standard.
- Each lock can be used independently from the other.
- Any chosen electronic or duress alarm system can be added to the door if required.
- Overall door thickness of 180mm including a slab section of 100mm combining a lamination of alloy and refractory material to resist oxy acetylene and drill attack.
- Emergency internal release mechanism fitted as standard.
- **LOCKING** - Available in
 - Dial combination
 - Key locking
 - Digital

INSURANCE COVER

Risk rated at **\$250,000**



The COMMANDER door is designed to resist:

- **Oxy-Acetylene attack**
- **Drills and abrasive grinders**
- **Explosives and force**
- **Pneumatic and hydraulic tools**

- RESISTANT TO**
- PNEUMATIC TOOLS • HYDRAULIC TOOLS
 - FORCE • EXPLOSIVES • OXY-ACETYLENE
 - CUTTING INSTRUMENTS



COMMANDER STRONGROOM DOOR & FRAME DESIGNED TO BE FIRE RESISTING

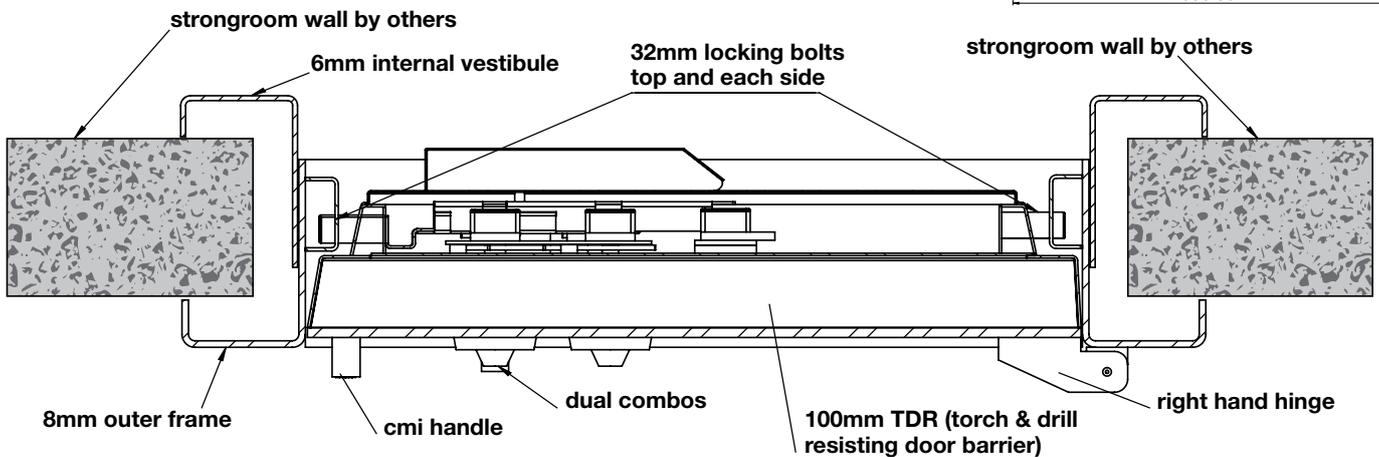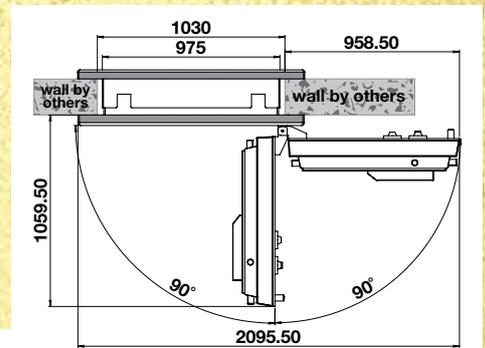

MODEL	PRICE INCL. GST	CLEAR DOOR OPENING		CLEAR MASONRY REQUIRED OPENING		WEIGHT	DELIVERY & INSTALLATION LEVEL ACCESS INCL. GST
		HEIGHT	WIDTH	HEIGHT	WIDTH		
CRD4	\$	1980 mm	860 mm	2080 mm	1030 mm	1315kg	\$

WHEN ORDERING PLEASE STATE IF LEFT OR RIGHT HAND HINGING REQUIRED AND VAULT WALL THICKNESS.

CMI SAFE CO. ABN 20 118 637 245
 Head Office: 244 West Street, Carlton NSW 2218
 Phone: (02) 9547 1488 Fax: (02) 9547 2104
 Website: www.cmisafe.com.au
 Email: sales@cmisafe.com.au

AVAILABLE FROM

MADE IN AUSTRALIA