



AS1428.1 2009 APPROVED DOORS









AS1428.1 2009 APPROVED DOORS

MODEL G-CDB4

FEATURES

- Secured each side and top by 11 x 32mm locking bolts.
- Overall door thickness of 174mm including fire pan.
- Emergency internal release mechanism fitted as standard.
- Glass activated deadlocking devices are provided within the door as standard.
- Full hard plate protection over all vital areas.
- Several micro switches installed as standard to confirm status of all possible entry points.
- Locking by KABA X10 lock, no batteries required.



Model	Clear Door Opening Height mm Width mm		Clear Masonry Opening Required Height mm Width mm		Weight	
	neight mm	wiath mm	neight mm	wiath mm		
G-CDB4	1980	860	2060	1020	495kg	


When ordering state if left or right hand hinging required and existing wall thickness.



ALL CMI SAFES COME WITH A FIVE YEAR WARRANTY, EXCLUDING FREIGHT AND TRAVELLING, WITH A 24 MONTH WARRANTY ON LOCKS.



Class B SCEC
Strongroom
Door and Frame
designed to be
fire resisting for
one hour

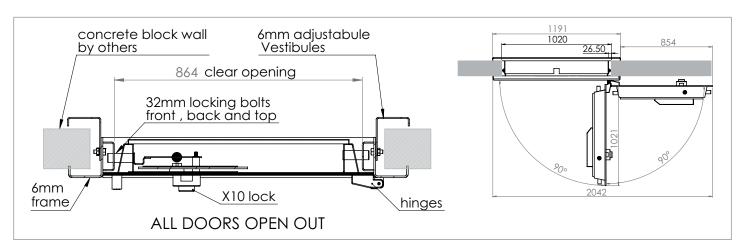

CMI Safe Co ABN | 35 664 874 766 02 9547 1488

🖾 sales@cmisafe.com.au

244 West St | Carlton | NSW | 2218

www.cmisafe.com.au

